




IDS H-Series Fluted Reamers

For Small to Mid-Sized Rigs

IDS 'H1F' Fluted Compaction Reamer

Features:

- 30° tapered body for highly effective cutting and compaction
- Available with a range of threads and back-end connections (see below)
- Forward and rear facing jets with replaceable Jet Nozzles
- TC rock-cutting teeth
- Fluted body for effective displacement of cuttings
- Available in standard sizes 8" (200mm) – 20" (500mm) diameter

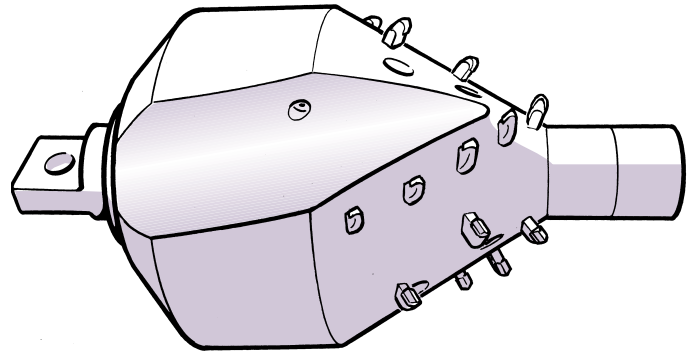

Product Code: H1F


Recommended Use: For general-purpose use across a range of conditions.

The H1F delivers high-performance in medium density clay, boulder clay, aggregates and rocky soils.

IDS 'H2F' Fluted Compaction Reamer

Features:

- 30° tapered body for highly effective cutting and compaction
- Available with a range of threads and back-end connections (see below)
- Forward and rear facing jets with replaceable Jet Nozzles
- Replaceable TC rock-cutting pick teeth for aggressive cutting action
- Fluted body for effective displacement of cuttings
- Available in standard sizes 8" (200mm) – 20" (500mm) diameter

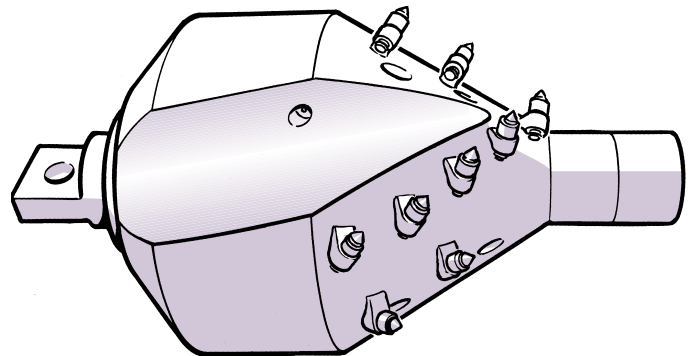


Product Code: H2F

Recommended Use: For general-purpose use in medium-hard ground.


The H2F performs excellently in conditions such as stiff clays and rocky soils where an aggressive reaming action is desirable.

Threaded Connection



- API, IDS or 'OEM' (HDD rig) connections available
- Pin (male) or box (female) threads as required


Pulling Eye



- For compatibility with IDS Swivels or to custom specifications

Code: PE

Integral Swivel Socket

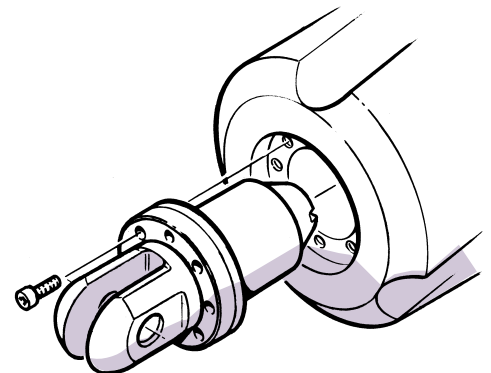

- To receive IDS Integral Swivel (Integral Swivel not included)

Code: ISS